

8038Z 80x80x38MM

DUST PROOF SERIES

NEW



General Specifications


- ◆ Material..... Frame: Plastic (UL94V-0)  
Impeller: Plastic (UL94V-0)  
Lead Wire: UL1007AWG#24 or Equivalent (+) Red, (-) Black
- ◆ Expected Life..... Ball Bearing 70,000hrs (40°C)
- ◆ Temperature Range... Operating temperature -10°C~70°C (Non-condensing)  
Storage temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, TUV, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, PWM, Temperature control, IP68

Specifications

Model	Rev	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	A	B.S	VDC	VDC	Amp	Watt	RPM	CFM	m <sup>3</sup> /min	Inch-H <sub>2</sub> O	Pa	dB-A	g
DZ08038#12U	UFA	B	12	7.0~13.8	1.35	16.20	9500	92.83	2.63	2.60	646.80	63.9	253.0
DZ08038#12H	UFA	B	12	7.0~13.8	1.00	12.00	8500	82.48	2.34	2.09	520.38	61.1	253.0
DZ08038#12M	UFA	B	12	7.0~13.8	0.78	9.36	7500	72.71	2.06	1.61	401.80	57.9	253.0
DZ08038#12L	UFA	B	12	7.0~13.8	0.57	6.84	6500	62.82	1.76	1.20	298.90	54.2	253.0
DZ08038#12D	UFA	B	12	7.0~13.8	0.38	4.56	5500	45.11	1.49	0.86	214.62	51.6	253.0
DZ08038#24U	UFA	B	24	14.0~27.6	0.67	16.08	9500	92.83	2.63	2.60	646.80	63.9	253.0
DZ08038#24H	UFA	B	24	14.0~27.6	0.50	12.00	8500	82.48	2.34	2.09	520.38	61.1	253.0
DZ08038#24M	UFA	B	24	14.0~27.6	0.37	8.88	7500	72.71	2.06	1.61	401.80	57.9	253.0
DZ08038#24L	UFA	B	24	14.0~27.6	0.28	6.72	6500	62.82	1.76	1.20	298.90	54.2	253.0
DZ08038#24D	UFA	B	24	14.0~27.6	0.20	4.80	5500	45.11	1.49	0.86	214.62	51.6	253.0
DZ08038#48U	UFA	B	48	28.0~56.0	0.36	17.28	9500	92.83	2.63	2.60	646.80	63.9	253.0
DZ08038#48H	UFA	B	48	28.0~56.0	0.29	13.92	8500	82.48	2.34	2.09	520.38	61.1	253.0
DZ08038#48M	UFA	B	48	28.0~56.0	0.21	10.08	7500	72.71	2.06	1.61	401.80	57.9	253.0
DZ08038#48L	UFA	B	48	28.0~56.0	0.15	7.20	6500	62.82	1.76	1.20	298.90	54.2	253.0
DZ08038#48D	UFA	B	48	28.0~56.0	0.10	4.80	5500	45.11	1.49	0.86	214.62	51.6	253.0

Specifications are subject to change without notice. Please visit our website at <http://www.szhxht.com> for update information

Dimensions (Unit:mm)

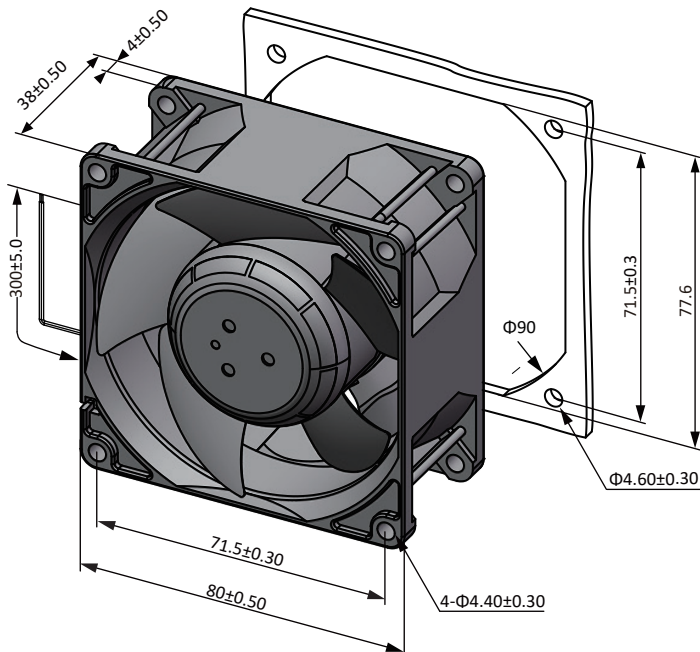

PQ Curve (At rated Voltage)

